


## TECHNICAL SPECIFICATIONS COMPACT HAND WASHING SYSTEM

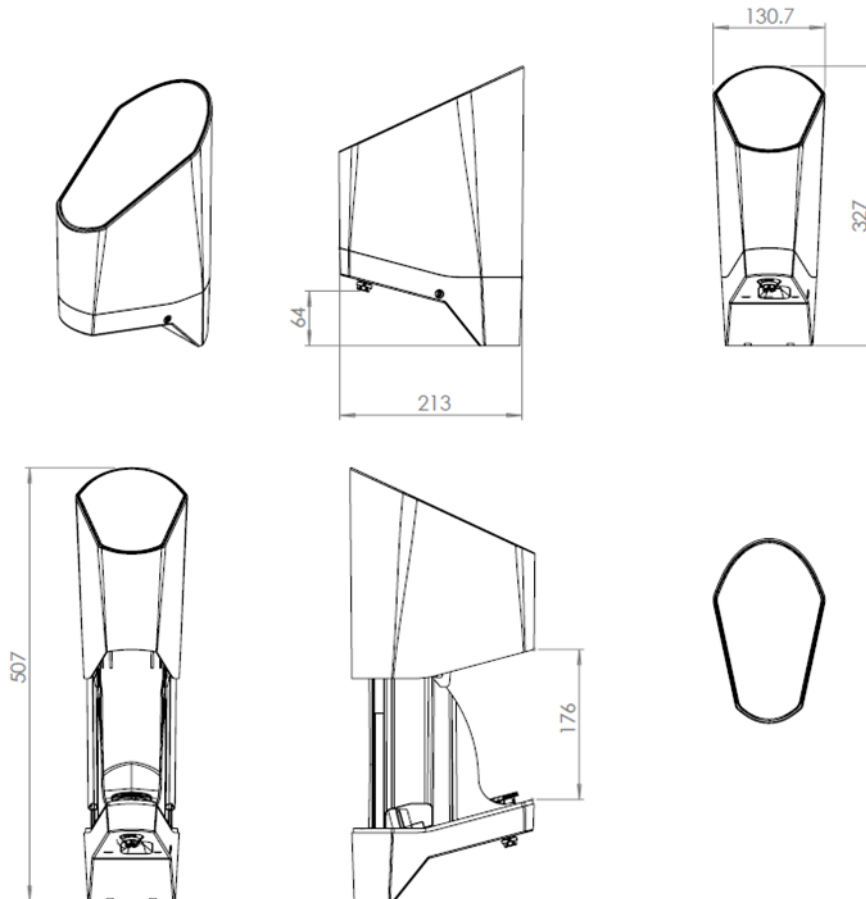

<b>Dimensions and Weight</b>	
Height	327 mm
Width	131 mm
Depth	213 mm
Net weight	4 kg

<b>Construction</b>	
Base	Zink Alloy molding
Cover	PC-ABS

<b>Water</b>	
Connections	G1/2 Female
Water mains pressure	1.5 - 10 bar
Operating pressure	0.6 - 0.8 bar

<b>Environmental Conditions</b>	
Ambient temperature	5 – 40 °C
Relative air humidity	< 80 %

<b>Electrical</b>	
Input voltage (to power supply)	100-240 V AC
Maximum power consumption	20 W
Standby power consumption	1.5 W

<b>Operation</b>			
Touch free activation	Infrared sensors		
Adjustable hand washing parameters	Quantity of soap	(Factory setting) 0.5 ml	(min – max) 0.2 – 5 ml
	Time of soap distribution	3 s	1 – 20 s
	Length of pause	3 s	0 – 20 s
	Rinsing time	12 s	1 – 40 s
Settings and control	Local: Menu accessible by Wlan using web browsers Remote: through SRCM* <sup>1</sup>		
Service alerts	Blue LEDs for consumables replacement		
Technical maintenance alerts	Red LEDs for system status and errors		

\*<sup>1</sup> Smixin Remote Central Management

<b>Soap Recharge Packs</b>	
Volume of recharge packs and hand wash capacity	1.25 L – 2500 hand wash cycles Based on standard setting 0.5 ml soap per hand wash.
Material of Smart Mixing Unit	Polypropylene PP / Polyoxymethylene POM / Silicone

<b>Option</b>	
SRCM - Smixin Remote Central Management	SRCM is a software solution that helps to efficiently manage the installed Compact units from a central point. The corresponding web-application can be used on PCs and on mobile devices.
Water-Only tap	For water only, option to integrate washroom offer (under development)

<b>Packaging</b>	
Dimension	575 x 375 x 193 mm
Weight	9,5 kg

<b>Guarantee</b>	
2 years against defect in material and workmanship	

Product specifications and prices are subject to change without prior notice.